



UC2K HD Coating

PRODUCT: UNICOATINGS
PDS PREPARATION DATE: 03 September 2015,
updated 09 May 2016

UC2K HD LACQUER (2 COMPONENTS)

A two-component clear coating based on chemical nanotechnology. **Unicoat 2k HD Lacquer** offers exceptional gloss retention and weather resistance for many years. The sealed surface is able to be cleaned easily, without using a special cleanser, and is more resistant to new soiling by virtue of its "easy-to-clean" effect. Dull and tired paintwork, chalky glass-fibre (GFK) surfaces and cloudy and tired anodised aluminium gleams again "just like new" and in original colours after treatment. Galvanised surfaces such as aluminium, brass, copper, and chrome are protected long-term against corrosion. Due to the extremely thin "minimum-coating" thickness, a coating capacity of about 50 - 60 sq. metres on not absorbing surfaces can be achieved per 1kg when applied to non-absorbent surfaces. For application on concrete or plastered surfaces we are able to offer a "less gloss" version of the product. Used on such surfaces 30-40 sq. metres can be achieved with 1kg. The thin film coat and low viscosity of **Unicoat 2k HD Lacquer** means it can be applied via brushing, rolling, ragging or spraying. This is ideal in areas where spraying is not possible. Perfect for use on aluminium (whether treated or not) stainless-steel, brass, copper, magnesium, ceramics, GFK glass-bre, concrete, as well as on plaster surfaces and mineral bases. Surfaces already coated with other products can be "refreshed", sealed and protected on a long-term basis.

PRODUCT NUMBER: UC 2K HD LACQUER - 2 COMPONENTS
MEETS GHS AND ISO 11014-1

PROPERTIES

- Excellent gloss and long-life properties
- Long lasting "easy-to-clean" nal coating
- Protection against UV rays which prevents bleaching of surfaces.
- "Anti-Grati" and "Anti-ngerprinting" capacity
- Long lasting protection against corrosion.
- Extremely resistance to mechanical inuences
- Stability against condensation and climatic/temperature variations
- Resistance against acid and solvent invasions
- No special preparation of the base material is required
- High productivity because of extremely minimum layer thickness

TECHNICAL DATA

Mixing proportions Base :	Hardener 5.5 : 1 by weight
Dilution:	Nil
Finish:	High Gloss
Color:	Transparent
Coating thickness:	5 - 20um (dry)
Temperature Stability:	-20 deg C to 150 deg C
Pot-Life:	About 4 hours at 20 deg C
Dust Dry:	* After about 6 hours at 20 deg C
Finally Dry:	* After about 7 days at 20 deg C
Second Coat:	Not Necessary
Accelerated Drying:	Above 60 deg C when dust dry
Application:	HVLP, Nozzle 0.8mm, Pressure 2 bar

*Working at a temperature below 15 degrees can result in a much longer drying time.

UC2K HD Coating

PRODUCT: UNICOATINGS
PDS PREPARATION DATE: 03 September 2015,
updated 09 May 2016

APPLICATION

Application is possible using the accepted methods (rolling, brush-painting, spraying or by immersion) To achieve the most successful surface HVLP Spray application is recommended. The version "S" can be applied alternatively with a roller or a cloth free of any fuzz. The surface should be cleaned (free from fats, polishes, waxes and tensides), dry and free from dust and any fatty/oily materials. For cleaning purposes silicone remover (Cleanser) is advised. For Aluminium and Magnesium surfaces an alkaline cleanser is advised. Please see that only a minimum surface thickness is needed ! Details in the application vary depending upon the surface which is to be coated. We are happy to advise you fully in these cases.

PRODUCT DENITION / TRANSPORT DENITION

Base: Xi = Reizend, UN 1263
Hardener: C = Ätzend, UN 2920

AVAILABILITY

1 kg box, 5 litre canister, 25 litre canister. Other packing forms/sizes are possible after prior consultation with us and according to the transport possibilities/regulations.

STORAGE

The product may be stored for at least 12 months in its original packing. Protect from frost and direct sunlight.

PRODUCT NUMBER: UC 2K HD LACQUER - 2 COMPONENTS
MEETS GHS AND ISO 11014-1

DISPOSAL

Empty containers as well as any remaining product must be disposed of according to the local laws and regulations or it must be taken to the community collection point for such materials.

SAFETY/PROTECTION MEASURES

When using this product please take note of the instructions on the bottle/canister. We wish to make it clear that the use of chemical preparations should only take place when the safety measures are observed and are always out of the reach of children. The technical information given here is according to the latest technical knowledge and composed from our own experience. In view of the many uses possible with this product it is therefore the responsibility of the user to act according to the given situation in respect of safety - that is to say the user acts upon their own responsibility in any given situation when using this product. That the use of this product takes place out of our jurisdiction, we have set out safety and protection measures, but we cannot be held responsible in any circumstances. For any misuse of the product we cannot be held responsible. In the event of a new version of this information becoming available - this information here set out is no longer valid.

UC2K HD Coating

PRODUCT: UNICOATINGS
PDS PREPARATION DATE: 03 September 2015,
updated 09 May 2016

PRODUCT NUMBER: UC 2K HD LACQUER - 2 COMPONENTS
MEETS GHS AND ISO 11014-1


EXAMPLES/PICTURES



A bleached surface - before and after coating with UniCoat 2k Lacquer



A coated Alu-façade after coating with UniCoat 2k Lacquer. (the section shows the degree of dirt before)

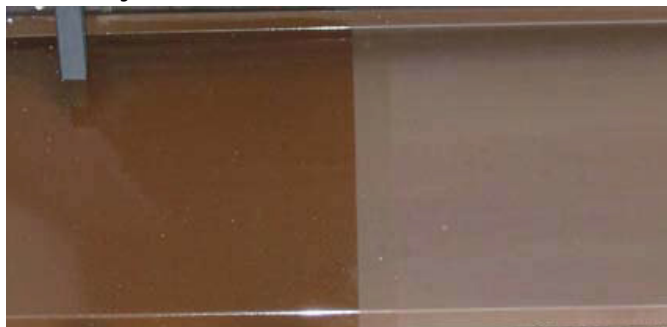

Part of an old and bleached Aluminium façade, following a clear coating.
High-gloss, colour enhancement and "easy-to-clean-effect" with minimum 5 year guarantee